

BASSO24t

Dual-12" Compact Band-Pass Multipurpose Subwoofer





QuickStart Guide

Many key factors are to be considered when configuring the subwoofer section of a loudspeaker system to perfectly match each application: size/weight, logistic and operational setups, SPL needs, LF extension, cost limitations, as well as sound engineer preferences (depending on different the type and size of the event) or audio program characteristics and regional style taste for subwoofer mixes.

BASSO Series models allow the user to choose the most adequate subwoofer for any given situation from within a family of products with common finish, design solutions and performance philosophy as well as shared rigging and transport accessories.

BASSO24t F400 is a dual 12" band-pass subwoofer with a very shallow-form factor and excellent power-density that make this loudspeaker a versatile tool for any small, unobtrusive installed sound reinforcement and portable FOH applications to more powerful, medium-sized configurations for Touring and Rental companies and theatre and club installations.

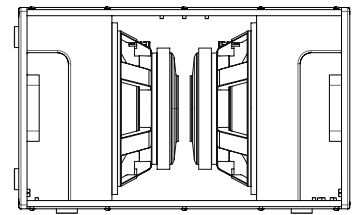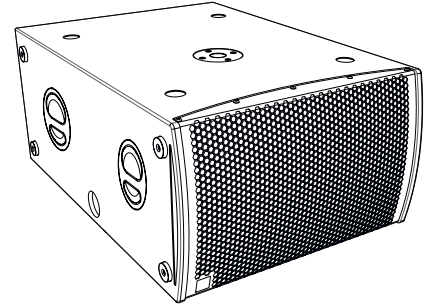

SYSTEM CONFIGURATION AND SETTINGS

BASSO24t back panel is fitted with a pair of Neutrik NL-4 connectors in parallel for straightforward, flexible installation setup.

NL-4 PINOUT:

+/- 1	Subwoofer Signal
+/- 2	Parallel Signal



RECOMMENDED SETTINGS

LPF@ 80 Hz

Type	Freq	Q	Gain
Bell	166 Hz	7.0	-6.00
Bell	74 Hz	5.0	1.70
Bell	169 Hz	5.0	-4.30
Bell	63 Hz	14.0	-1.00
HPF:	26 Hz	Butterworth 18dB	
LPF:	76 Hz	Butterworth 24dB	

LPF@ 100 Hz

Type	Freq	Q	Gain
Bell	166 Hz	7.0	-6.00
Bell	93 Hz	7.0	2.00
Bell	169 Hz	5.0	-4.30
Bell	63 Hz	13.0	-0.80
HPF:	26 Hz	Butterworth 18dB	
LPF:	93 Hz	Butterworth 24dB	

LPF@ 120 Hz

Type	Freq	Q	Gain
Bell	166 Hz	7.0	-6.00
Bell	105 Hz	7.0	0.50
Bell	169 Hz	5.0	-4.30
Bell	63 Hz	13.0	-0.80
Bell	240 Hz	8.0	-8.00
HPF:	26 Hz	Butterworth 18dB	
LPF:	117 Hz	Butterworth 24dB	

LPF@ 160 Hz

Type	Freq	Q	Gain
Bell	166 Hz	6.0	-5.00
Bell	250 Hz	6.0	-11.00
Bell	124 Hz	6.0	-1.60
Bell	137 Hz	5.7	1.40
Bell	63 Hz	13.0	-0.80
Bell	250 Hz	4.0	-1.80
HPF:	26 Hz	Butterworth 18dB	
LPF:	165 Hz	Butterworth 24dB	


TECHNICAL DATA

Enclosure design	Symmetrical Air mass Loading 5th order Band-Pass
Transducers	2 x 12"
RMS Power Handling *	1 500 W
Nominal Impedance	4 Ohm
SPL (Continuous/Peak)	129/135 dB SPL
Frequency Range (-10 dB)	44 - 100/120/150/180 Hz
Frequency Range (-3 dB)	52 - 80/100/120/160 Hz
Dimensions (WxHxD)	600 x 365 x 850 mm (23,6 x 14,4 x 33,5 inch)
Weight	49 kg (108 lbs)
Connectors	2 x Neutrik speakON® NL-4 in Parallel
+/-1	Input
+/-2	Link
Cabinet Construction	15 mm Plywood
Grille	1.5 mm perforated weatherised steel with protective foam
Finish	Durable IDEA proprietary Aquaforce paint coating process
Handles	4 integrated handles
Feet/Skates	4 rubber feet
Installation	4 threaded M8 inserts. 2 x 36-mm Pole mount sockets (H/V)
Accessories	35 mm Pole (K&M-21338)

* IEC filtered pink noise with a 6dB crest factor, 2 hours.

** Frequency range values for recommended factory presets.

TECHNICAL DRAWINGS

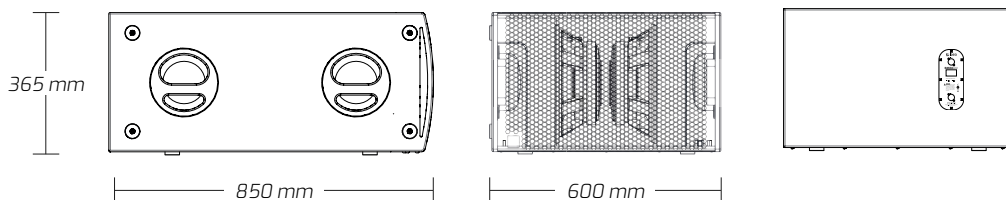

WARNINGS AND SAFETY GUIDELINES

- Read this document thoroughly, follow all safety warnings and keep it for future reference.



- The exclamation mark inside a triangle indicates that whatever repairing and component replacement operations must be done by qualified and authorized personnel.

- No user serviceable parts inside.

- Only use accessories tested and approved by IDEA and supplied by the manufacturer or an authorized dealer.

- Installations, rigging and suspension operations must be done by qualified personnel.

- Only use accessories specified by IDEA, complying with maximum loads specifications and following local safety regulations.



- Read the specifications and connection instructions before proceeding to connect the system and use only cabling supplied or recommended by IDEA. Connection of the system should be done by qualified personnel.

- Professional sound reinforcement systems can deliver high SPL levels that may result in hearing damage. Do not stand close to the system while in use.



- Loudspeakers produce magnetic field even while they are not in use or even when disconnected. Do not place or expose loudspeakers to any device that is sensitive to magnetic fields such as television monitors or data storage magnetic material.

- Disconnect the equipment during lightning storms and when it is not to be used for a long time.

- Do not expose this device to rain or moisture.

- Do not place any objects containing liquids, such as bottles or glasses, on the top of the unit. Do not splash liquids on the unit.

- Clean with a wet cloth. Do not use solvent-based cleaners.

- Regularly check the loudspeaker housings and accessories for visible signs of wear and tear, and replace them when necessary.

- Refer all servicing to qualified service personnel.



- This symbol on the product indicates that this product should not be treated as household waste. Follow local regulation for recycling of electronic devices.

- IDEA declines any responsibility from misuse that may result in malfunction or damage of the equipment.

WARRANTY

- All IDEA products are guaranteed against any manufacturing defect for a period of 5 years from date of purchase for acoustical parts and 2 years from date of purchase for electronic devices.
- The guarantee excludes damage from incorrect use of the product.
- Any guarantee repair, replacement and servicing must be exclusively done by the factory or any of authorized service centres.
- Do not open or intend to repair the product; otherwise servicing and replacement will not be applicable for guarantee repair.
- Return the damaged unit, at shipper's risk and freight prepaid, to the nearest service centre with a copy of the purchase invoice in order to claim guarantee service or replacement.

DECLARATION OF CONFORMITY

I MAS D Electroacústica SL

Pol. A Trabe 19-20 15350 CEDEIRA (Galicia - Spain)

Declares that: BASSO24t

Complies with the following EU Directives:

RoHS (2002/95/CE) Restriction of Hazardous Substances

LVD (2006/95/CE) Low Voltage Directive

EMC (2004/108/CE) Electro-Magnetic Compatibility

WEEE (2002/96/CE) Waste of Electric and Electronic Equipment

EN 60065: 2002 Audio, video and similar electronic apparatus. Safety requirements.

EN 55103-1: 1996 Electromagnetic compatibility: Emission

EN 55103-2: 1996 Electromagnetic compatibility: Immunity



www.ideaproaudio.com



For further information scan the QR Code
or refer to the following web address: www.ideaproaudio.com/basso24t

IDEA is always in pursuit of better performance, greater reliability and design features.
Technical specifications and minor finish details may vary without notice in order to improve our products.

©2020 - I MAS D Electroacústica SL

PoL A Trabe 19-20 15350 Cedeira (Galicia - Spain)