

### FEATURES

- Rugged and durable 18 mm birch plywood construction and finish
- Bass reflex design with 5th order tuning
- Premium European High Efficiency custom IDEA Transducers
- 8 Ohm Passive
- Dual Neutrik NL4 connectors
- Durable Aquaforce paint, available in standard textured black or white.
- Optional RAL colors (on demand)
- Turn-key Factory Amplifier/DSP dedicated configurations
- 36 mm pole cup and four integrated handles
- Compatible rigging accessories (optional) for stacked and flown configurations with VOA systems



### APPLICATIONS

- High SPL A/V, portable professional sound reinforcement and touring
- Main or distributed subwoofer system in Pubs, Lounges, Bars and clubs
- "Infra" extension to other BASSO series subwoofers
- Broadcast Studios and Screening rooms



### OVERVIEW

Many key factors are to be considered when configuring the subwoofer section of a loudspeaker system to perfectly match each application: size/weight, logistic and operational setups, SPL needs, LF extension, cost limitations, as well as sound engineer preferences (depending on different the type and size of the event) or audio program characteristics and regional style taste for subwoofer mixes.

**BASSO** Series models allow the user to choose the most adequate subwoofer for any given situation from within a family of products with common finish, design solutions and performance philosophy as well as shared rigging and transport accessories.

**BASSO21** is a high-density single 18" direct radiation subwoofer that delivers a very natural, linear response in the VLF range from 25 Hz up to 140 Hz. Built with 18" Premium birch plywood and fitted with a 2 mm steel grille, this medium format medium format cabinet is finished with IDEA Aquaforce weatherized coating to endure life on the road or stylishly integrate in any installation.

**BASSO21** seamlessly matches with 2-way loudspeakers in **LUA** and **EXO** Series maximizing the high-density performance of these systems for a wide range of portable, mobile and install professional sound reinforcement applications, from high power club sound systems and medium size live music events to rental and touring companies.

**BASSO21** can be (on demand) served with **BASSO** rigging structures, allowing for stacked and flown configurations.



## TECHNICAL DATA


<b>Enclosure design</b>	Bass Reflex
<b>Transducers</b>	2T
<b>RMS Power Handling *</b>	1500 W
<b>Nominal Impedance</b>	8 Ohm
<b>SPL (Continuous/Peak)</b>	131/137 dB SPL
<b>Frequency Range (-10 dB)</b>	25 - 80/100/120/140 Hz
<b>Frequency Range (-3 dB)</b>	30 - 65/80/100/120 Hz
<b>Dimensions (WxHxD)</b>	600 x 600 x 950 mm (23,6 x 23,6 x 37,4 inch)
<b>Weight</b>	70 kg (154,3 lbs)
<b>Connectors</b>	2 x Neutrik speakON® NL-4 in Parallel
<b>+/-1</b>	Input
<b>+/-2</b>	Link
<b>Cabinet Construction</b>	18 mm Plywood
<b>Grille</b>	2 mm perforated weatherised steel with protective foam
<b>Finish</b>	Durable IDEA proprietary Aquaforce paint coating process
<b>Handles</b>	4 integrated handles
<b>Feet/Skates</b>	4 rubber feet
<b>Installation</b>	36 mm Pole mount socket
<b>Accessories</b>	Riggin Frame (RF-600) Riggin System (RS-BASSO-L) Wheels (WH-04) 35 mm Pole (K&M-21338)

\* IEC filtered pink noise with a 6dB crest factor, 2 hours.


\*\* Frequency range values for recommended factory presets.

## ACOUSTICAL MEASUREMENTS

### FREQUENCY RESPONSE

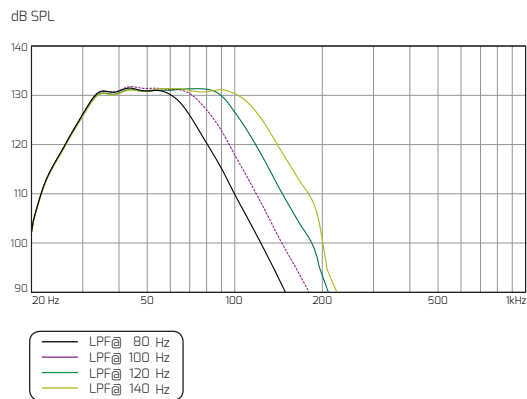

### IMPEDANCE

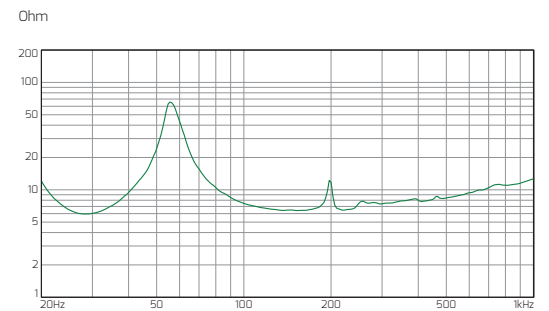

## TECHNICAL DRAWINGS

