

## BASSO10


Recommended Preset Settings for **TEOd8 Loudspeaker Management System**

### LPF@ 140 Hz

Type	Freq	Q	Gain
Bell	65 Hz	5.6	2.60
Bell	114 Hz	6.4	1.60
Low Pass	153 Hz	0.8	--

HPF:	35 Hz	Butterworth 18dB
LPF:	122 Hz	Butterworth 24dB

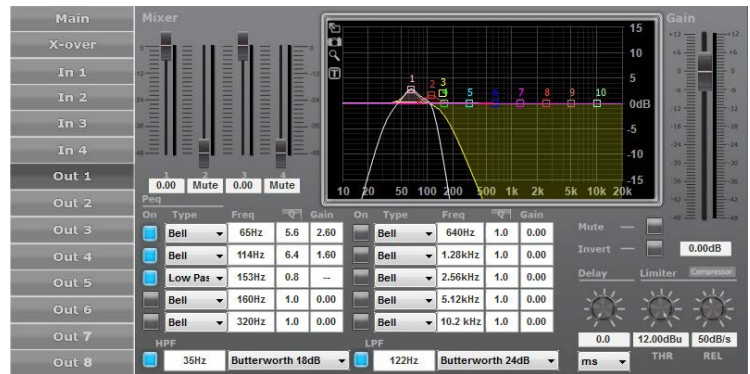


### LPF@ 200 Hz

Type	Freq	Q	Gain
Bell	65 Hz	5.6	2.80
Bell	114 Hz	6.4	1.60
Low Pass	205 Hz	0.8	--
Bell	140 Hz	9.0	3.50
Bell	110 Hz	4.0	-1.50

HPF:	35 Hz	Butterworth 18dB
LPF:	156 Hz	Butterworth 24dB

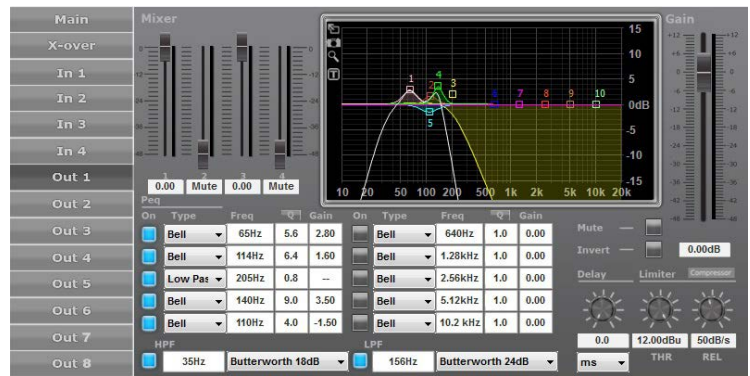

### LPF@ 240 Hz

Type	Freq	Q	Gain
Bell	65 Hz	5.6	2.80
Bell	96 Hz	8.0	-0.80
Low Pass	245 Hz	0.8	--
Bell	145 Hz	4.0	1.70
Bell	117 Hz	6.0	0.30

HPF:	35 Hz	Butterworth 18dB
LPF:	196 Hz	Butterworth 24dB

