


## Dual 12" Compact High Performance Band-Pass Multipurpose Subwoofer

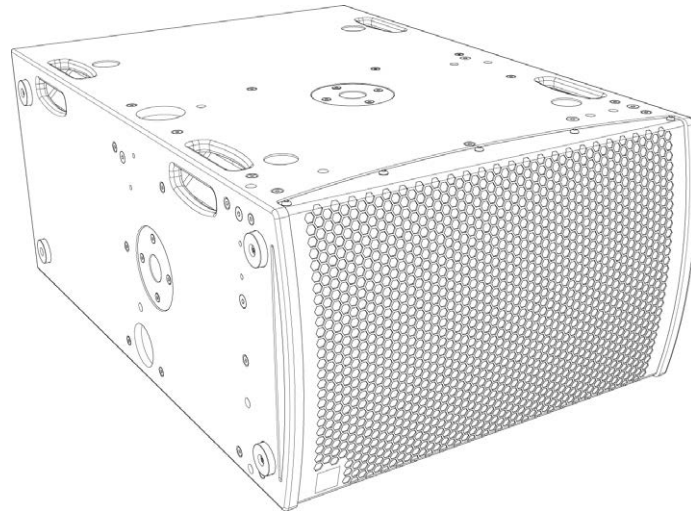

### FEATURES

- Rugged and durable 15 mm Birch Plywood construction and finish
- High output 5th order Band-Pass design
- Premium European High Efficiency custom IDEA Transducers
- 4 Ohm Passive
- Dual Neutrik NL4 connectors
- Durable Aquaforce paint, available in standard textured black or white, optional RAL colors (on demand)
- Turn-key Factory Amplifier/DSP dedicated configurations
- Two 36 mm pole cup and four integrated handles
- Very shallow form-factor

### APPLICATIONS

- High SPL A/V, portable professional sound reinforcement and touring
- Main or distributed subwoofer system in Pubs, Lounges, Bars and clubs

### OVERVIEW

Many key factors are to be considered when configuring the subwoofer section of a loudspeaker system to perfectly match each application: size/weight, logistic and operational setups, SPL needs, LF extension, cost limitations, as well as sound engineer preferences (depending on different the type and size of the event) or audio program characteristics and regional style taste for subwoofer mixes.

BASSO Series models allow the user to choose the most adequate subwoofer for any given situation from within a family of products with common finish, design solutions and performance philosophy as well as shared rigging and transport accessories.

BASSO24 is dual 12" direct radiation subwoofer with a very shallow-form factor and excellent power-density that make this loudspeaker a versatile tool for any small, unobtrusive installed sound reinforcement and portable FOH applications to more powerful, medium-sized configurations for Touring and Rental companies and theatre and club installations.

## TECHNICAL DATA

<b>Enclosure design</b>	Symmetrical Air mass Loading 5th order Band-Pass
<b>Transducers</b>	2 x 12"
<b>Continuous RMS Power</b> [6dB Crest Factor, 2h]	1,500 W
<b>Nominal Impedance</b>	4 Ohm
<b>Peak SPL</b> [Full Space/Half Space]	129/135 dB @ 1 m (2 ms, 6,000 W)
<b>Frequency Response</b> [-3 dB]	45 -100 Hz
<b>Dimensions</b> [WxHxD]	600 x 365 x 850 mm
<b>Weight</b>	56 Kg
<b>Connectors</b>	2 x NL-4 in Parallel
+/-1	Subwoofer Signal
+/-2	Parallel Signal
<b>Cabinet Construction</b>	15 mm Plywood
<b>Grille</b>	1.5 mm perforated weatherized steel with protective foam
<b>Finish</b>	Durable IDEA proprietary Aquaforce High Resistance Paint coating process
<b>Handles</b>	4 integrated handles
<b>Wheels</b>	Wheels not available for this model
<b>Feet/Skates</b>	4 rubber feet
<b>Rigging system</b>	Compatible rigging accessories (optional)
<b>Installation</b>	4 threaded M8 inserts. Top 35 mm Pole mount socket

## TECHNICAL DRAWINGS

